


# Product data sheet

# **A4020-PA 2POL \***

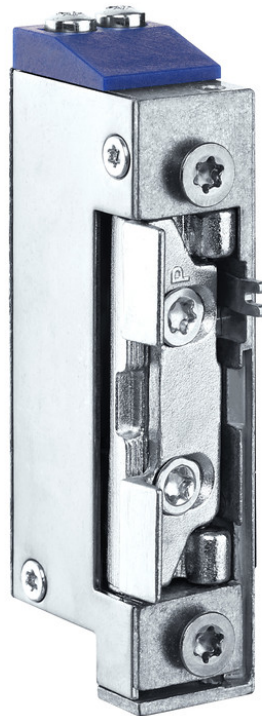

Electric strike with extended unlocking lever and wide recess  
in adjustable keep

## **AREAS OF APPLICATION**

- Standard doors
- Installation possible on left and right hand doors as well as horizontal or vertical
- Connection to direct or alternating current



## PRODUCT FEATURES

- Almost silent opening behaviour with direct current with one click
- Twin coil technology enables a larger operating voltage range
- Integrated bipolar EMC protective diode which protects connected electronic components against reverse voltage
- Compact dimensions
- Radius latch adjustable by 3 mm, in 0.75 mm pitch
- Unlocking lever for mechanical permanent unlocking of electric strike, 2 mm above strike plate
- Wide recess in adjustable keep, suitable for strike plates with integrated lock latch guide
- Safe release of the latch even under high side-load
- Pre-assembled screws for easy electrical connection

## TECHNICAL DATA

Productname	A4020-PA 2POL *
Dimensions	15.8 x 73.5 x 25 mm
DIN direction	left / right
Set position x grid dimension	4 x 0.75 mm
Latch engagement depth	4.5 mm
Installation position vertical / horizontal	Yes
Fail-safe	No
Fail-secure	Yes
Dummy strike	No
Continuous operation voltage	12 V AC/DC +/- 15 %
Approval for smoke protection doors	No
Mechanical release	Yes
Bipolar EMC protection diode integrated	Yes

## VARIANTS / ORDER INFO

Designation	Description	Ident- No.	Colour	Dimensions	DIN direction
A4020-PA vector electric strike *	Functional principle: fail-secure / with 2 mm longer unlocking lever / large recess in adjustable keep for KFV / (Karl Friedrich Vliether) strike plates / Continuous operation stability: 12 V AC/ DC +/- 15 % / Current consumption: 300 mA (at 12 V)	191081	blue	15.8 x 73.5 x 25 mm	left / right



---

\* The products designated above may vary in form, type, characteristics, function, or availability depending on the country. Please get in touch with your GEZE contact person if you have any questions.